

8-WAY CASSETTE 84x84

4 CAPACITIES

7.10~14.00 kW

ULTRA COMPACT DESIGNonly **200 mm** high for the 7.10 kW model
for installation in false ceilings**WASHABLE FILTER**

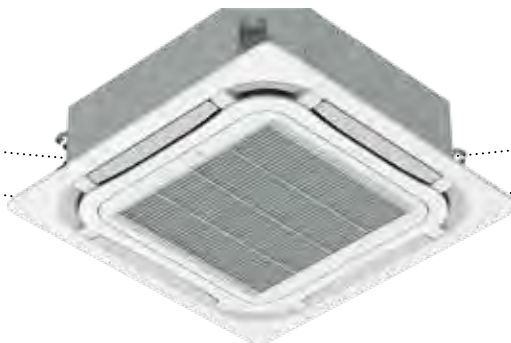
better air quality

INDIVIDUAL DEFLECTORS CONTROL

for better airflow management

CONDENSATE DRAIN PUMP INCLUDEDmaximum height difference **1200 mm**
from panel edge**CONTROLS**standard remote control
optional wired control**NEW**

M-V-CBA-712~1402-G

**Wi-Fi**
(optional)

Model			M-V-CBA-712-G		M-V-CBA-902-G	
Control (included)			Remote control			
Rated capacity	Cooling	kW	7.10		9.00	
	Heating	kW	8.00		10.00	
Electrical data						
Power supply		Ph-V-Hz	1-220~240V-50Hz			
Power absorption		W	60		75	
Product specifications						
Dimensions	WxHxD	mm	840x200x840		840x240x840	
Net weight		Kg	21		22.5	
Sound pressure level at 1 m	H/M/L	dB(A)	37/35/32		40/36/31	
Volume of air treated	H/M/L	m³/h	1100/935/850		1400/1000/900	
Connection diameter	Liquid/Gas	mm (inch)	9.52 (3/8") / 15.9 (5/8")			
	Condensate	mm	25		25	
Accessories						
Decorative panel			M-V-CGR-848-G			
Panel dimensions	WxHxD	mm	950x65x950		950x65x950	
Net weight		Kg	6		6	
Optional parts						
Wired control		M-V-CW-SD1-G (LCD) / M-V-CW-TW1-G (touch) / M-V-CW-HB2-G (simplified)				
Centralized control		M-V-CC-T255-G / M-V-CC-T32-G (simplified)				

Model			M-V-CBA-1122-G	M-V-CBA-1402-G
Control (included)			Remote control	
Rated capacity	Cooling	kW	11,20	14,00
	Heating	kW	12,50	16,00
Electrical data				
Power supply		Ph-V-Hz	1-220~240V-50Hz	
Power absorption		W	100	160
Product specifications				
Dimensions	WxHxD	mm	840x240x840	840x290x840
Net weight		Kg	22,5	25
Sound pressure level at 1 m	H/M/L	dB(A)	43/39/35	46/41/35
Volume of air treated	H/M/L	m³/h	1550/1200/1000	1800/1450/1150
Connection diameter	Liquid/Gas	mm (inch)	9,52 (3/8") / 15,9 (5/8")	
	Condensate	mm	25	25
Accessories				
Decorative panel			M-V-CGR-848-G	
Panel dimensions	WxHxD	mm	950x65x950	950x65x950
Net weight		Kg	6	6
Optional parts				
Wired control		M-V-CW-SD1-G (LCD) / M-V-CW-TW1-G (touch) / M-V-CW-HB2-G (simplified)		
Centralized control		M-V-CC-T255-G / M-V-CC-T32-G (simplified)		