

DUCTED HIGH STATIC PRESSURE

6 CAPACITIES
7.10~28.00 kW

WASHABLE FILTER
better air quality


Ideal for cooling and heating medium
and large sized rooms

CONTROLS
wired control included

ULTRA COMPACT DESIGN
only **300 mm** high for the
7.10 and 18.00 kW models

CONDENSATE DRAIN PUMP INCLUDED maximum height
difference **1100 mm** from the outlet
hole for models from 7.10 to 18.00 kW

5 FAN SPEEDS
auto, low, med, high, turbo

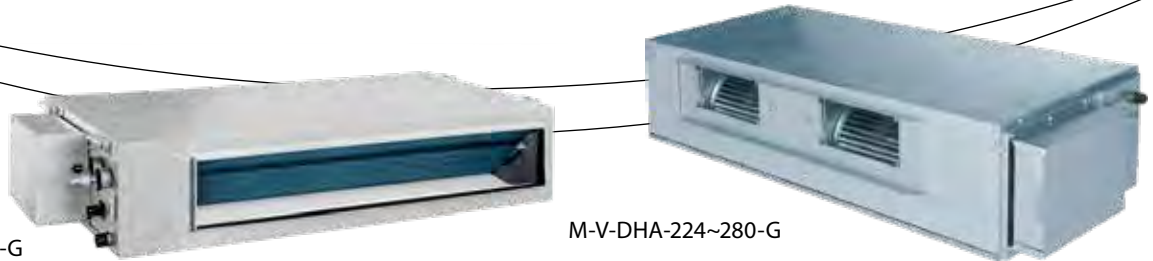

M-V-DHA-711~1401-G

M-V-DHA-224~280-G

| Model | | | M-V-DHA-711-G | M-V-DHA-901-G | M-V-DHA-1121-G | M-V-DHA-1401-G |
|-------------------------------|------------|-----------|--|----------------|----------------|----------------|
| Control (included) | | | Wired control | | | |
| Rated capacity | Cooling | kW | 7.10 | 9.00 | 11.20 | 14.00 |
| | Heating | kW | 8.00 | 10.00 | 12.50 | 16.00 |
| Electrical data | | | | | | |
| Power supply | | Ph-V-Hz | 1-220~240V-50Hz | | | |
| Power absorption | | W | 100 | 140 | 160 | 220 |
| Product specifications | | | | | | |
| Dimensions | WxHxD | mm | 1000x300x700 | 1400x300x700 | 1400x300x700 | 1400x300x700 |
| Net weight | | Kg | 43 | 57 | 57 | 58 |
| Sound pressure level at 1 m | H/M/L | dB(A) | 38/36/34 | 40/37/35 | 40/38/36 | 42/39/37 |
| Volume of air treated | H/M/L | m³/h | 1250/1050/950 | 1800/1450/1250 | 2000/1600/1400 | 2350/1900/1650 |
| Fan static pressure | Std/Max | Pa | 90/200 | 90/200 | 90/200 | 90/200 |
| Connection diameter | Liquid/Gas | mm (inch) | 9.52 (3/8") / 15.9 (5/8") | | | |
| | Condensate | mm | 25 | 25 | 25 | 25 |
| Optional parts | | | | | | |
| Centralized control | | | M-V-CC-T255-G2 / M-V-CC-T32-G (simplified) | | | |

| Model | | | M-V-DHA-224-G | M-V-DHA-280-G |
|-------------------------------|------------|-----------|--|----------------|
| Control (included) | | | Wired control | |
| Rated capacity | Cooling | kW | 22.40 | 28.00 |
| | Heating | kW | 25.00 | 31.00 |
| Electrical data | | | | |
| Power supply | | Ph-V-Hz | 1-220~240V-50Hz | |
| Power absorption | | W | 800 | 900 |
| Product specifications | | | | |
| Dimensions | WxHxD | mm | 1483x385x791 | 1686x450x870 |
| Net weight | | Kg | 82 | 105 |
| Sound pressure level at 1 m | H/M/L | dB(A) | 54/52/49 | 55/52/50 |
| Volume of air treated | H/M/L | m³/h | 4000/3600/3200 | 4400/4000/3600 |
| Fan static pressure | Std/Max | Pa | 100/200 | 100/200 |
| Connection diameter | Liquid/Gas | mm (inch) | 9.52 (3/8") / 19.05 (3/4") | |
| | Condensate | mm | 25 | |
| Optional parts | | | | |
| Centralized control | | | M-V-CC-T255-G2 / M-V-CC-T32-G (simplified) | |